


# ANSI Grade 1 156.3 Panic Hardware Rim Type & Vertical Rod Exit Devices



**9000 Series**  
**9100 Series**

**10 YEAR**  
**WARRANTY**

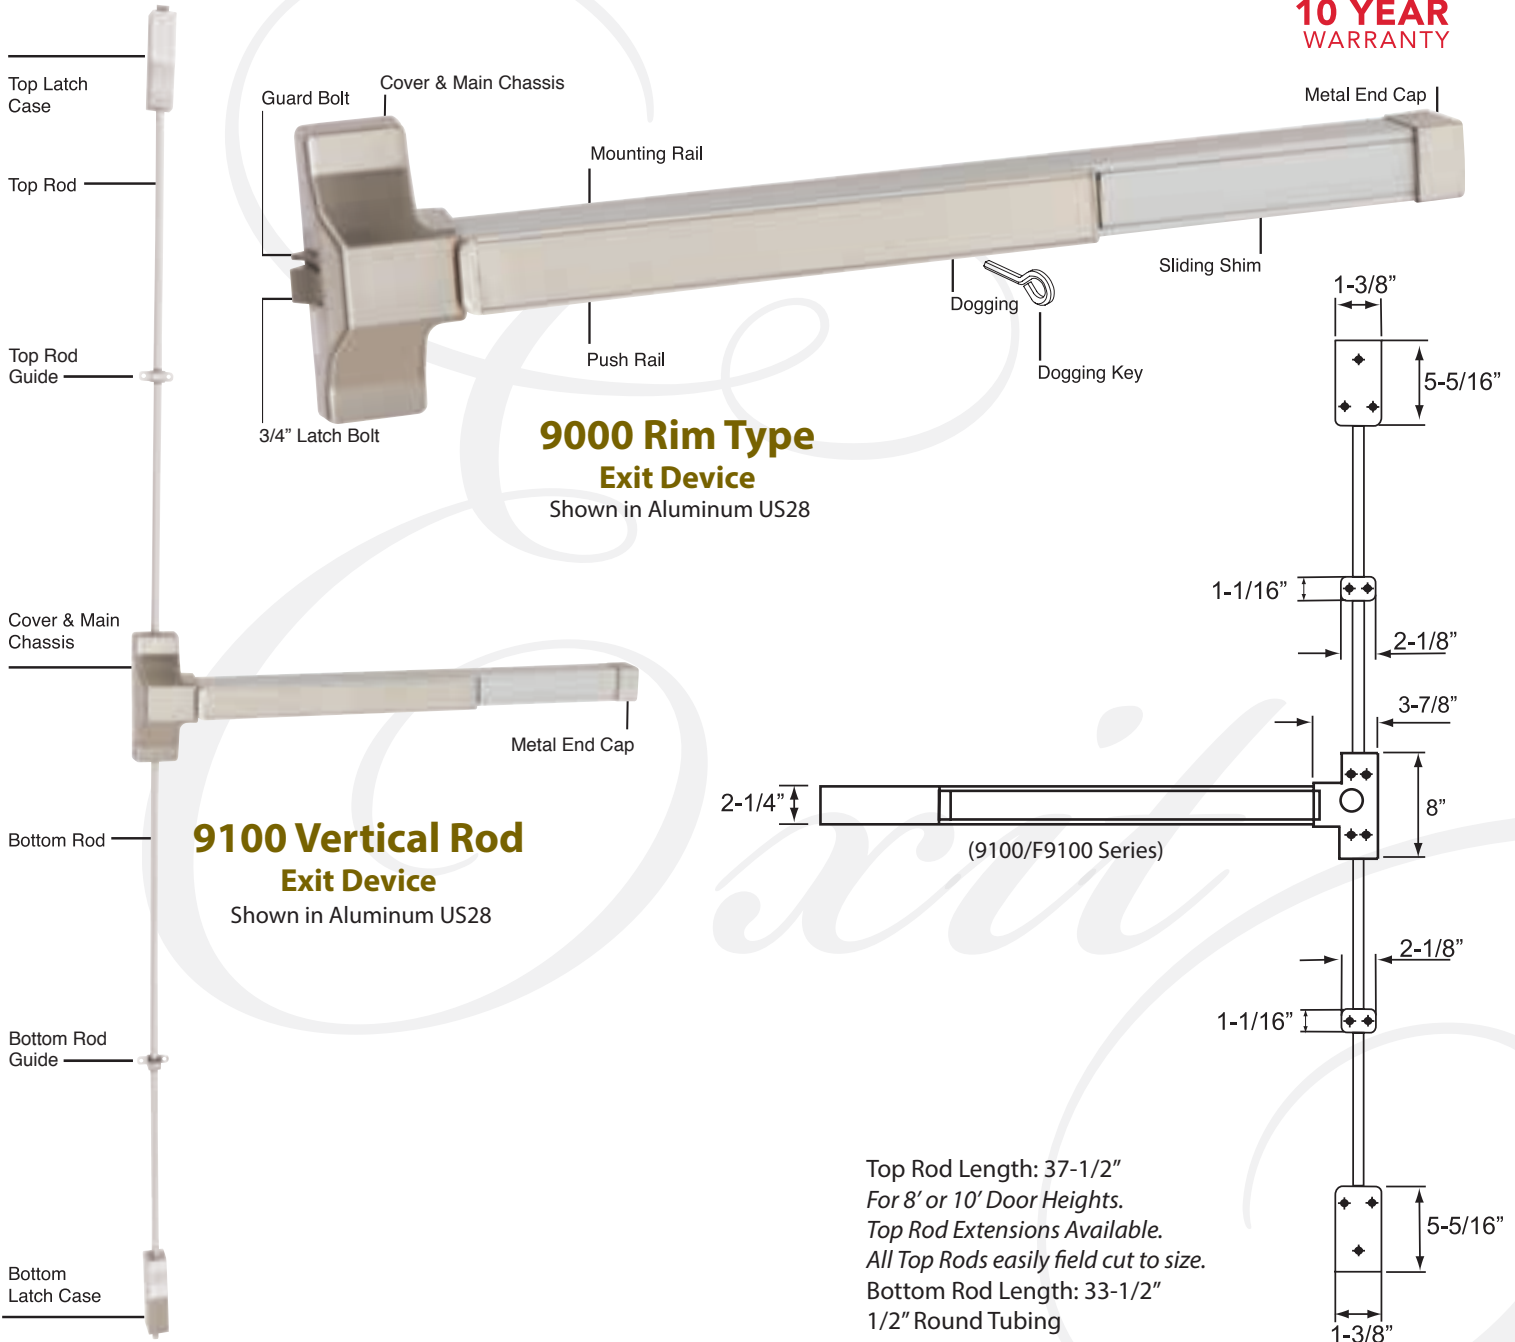

## 9000 Rim Type Exit Device

Shown in Aluminum US28

## 9100 Vertical Rod Exit Device

Shown in Aluminum US28

Top Rod Length: 37-1/2"  
For 8' or 10' Door Heights.  
Top Rod Extensions Available.  
All Top Rods easily field cut to size.  
Bottom Rod Length: 33-1/2"  
1/2" Round Tubing

## PRODUCT FEATURES

- Will cover stock hollow metal doors with 161 cutout.
- Hex Key Dogging feature standard.
- Outside Pull or Lever trim available (See Trim page for options).
- Non Handed (9000 Series)
- Reversible (9100 Series)

## FINISHES AVAILABLE

US CODE	DESCRIPTION
US28	Aluminum
US32D	Stainless Steel
DURO	Duro Bronze

## PRODUCT SPECIFICATIONS

- APPLICATIONS:** For offices, schools, hospitals, apartments, hotel/motels, and other public buildings.
- DOOR THICKNESS:** 1-3/4" ~ 2" standard, 2-1/4" optional.
- 9000 SERIES DOOR SIZE:** 33" to 36". Bar easily field cut to size.
- 9100 SERIES DOOR SIZE:** 33" to 36" x 84". Top Rod Extension available.
- STILE WIDTH:** 4-1/2" minimum stile width required for 9000 Series. 3-1/2" minimum stile width required for 9100 Series.
- CHASSIS, END CAP & RAIL ASSEMBLY:** Painted steel (Aluminum or Duro) or stainless steel (US32D).
- COVER:** Zinc Alloy
- LATCHBOLT:** Zinc with 3/4" throw (9000 Series — Optional). Zinc (9100 Series — Optional).
- LATCHBOLT SPRING:** Stainless steel throughout.
- GUARD BOLT:** Stainless steel (9000 Series only).
- 9000 SERIES STRIKE:** #8170 Steel Roller Strike – 2-3/4" Backset. Optional Strike #8070 for 2-3/8" Backset.
- 9100 SERIES STRIKE:** #8171 Steel Strike for Top Case. #8172 Zinc Strike for Bottom Case.
- MOUNTING:** Furnished standard with wood & machine screws. Sex nuts and bolts (1346) optional.
- UL & ULC LISTED:** Complies with UL 305 standards. Listed for safety as Panic Hardware.