


**F9100 SERIES (FIRE RATED)
GRADE 1 HEAVY DUTY
FIRE EXIT HARDWARE
VERTICAL ROD EXIT DEVICE**



DIMENSIONS

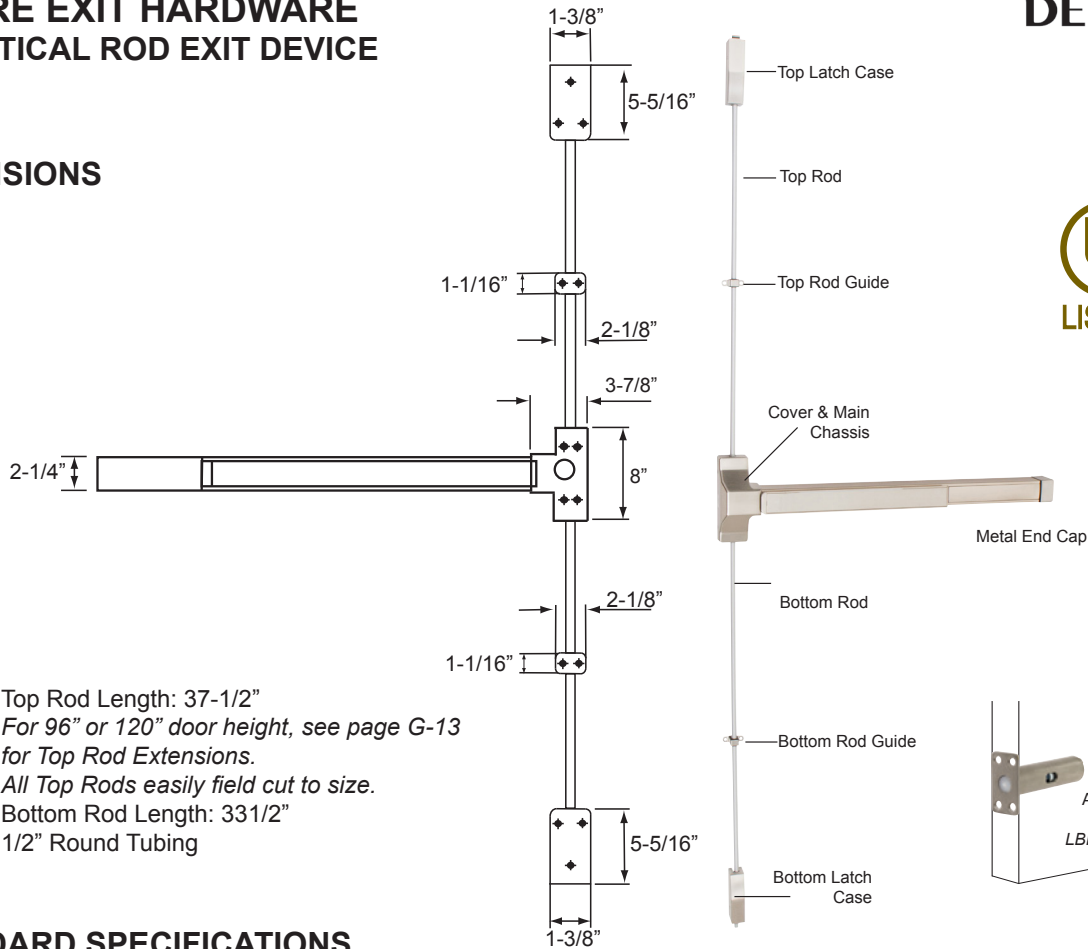

Top Rod Length: 37-1/2"
For 96" or 120" door height, see page G-13
for Top Rod Extensions.
All Top Rods easily field cut to size.
Bottom Rod Length: 33 1/2"
1/2" Round Tubing



**10 YEAR
WARRANTY**


STANDARD SPECIFICATIONS

Applications	Offices, Schools, Hospitals, Apartments, Hotel/Motels & other Public Buildings	Mounting	Furnished standard with wood & machine screws. Sex nuts and bolts (1346) included.
Door Size	33" to 36" x 84". Top Rod Extension Available (up to 10'). Bar easily field cut to size.	Latchbolt	Stainless
Stile Width	3-1/2" minimum stile width required.	Latchbolt Spring	Stainless Steel throughout.
Cover	Zinc Alloy	Strike	#8171 Steel Strike for Top Case. #8178 Steel Strike for Bottom Case. #8285 Overlapping Strike.
Chasis, End Cap & Rail Assembly	Fire Grade Steel: Painted Steel (Aluminum or Duro), Stainless Steel (US32D)	UL & ULC Listed	3-Hour Fire Rating. Listed as Fire Exit Hardware. Conforms to standards UL 10C and UBS 7-2-1997 codes
Rating	ANSI 156.3 Grade 1	Handing	Reversible
Door Prep	Will cover stock hollow metal doors with 161 cutout	Door Thickness	1-3/4" ~ 2" standard, 2-1/4" optional

ITEM DETAILS

Model	Description	WT/ CTN	QTY/ CTN	ALUMINUM		US32D Stainless Steel
				Item No.	694300	694301
F9100-3684	HD Fire Vertical Rod Type Device for 36" X 84" Door	62 Lbs	4			

EXTERIOR OPTIONS

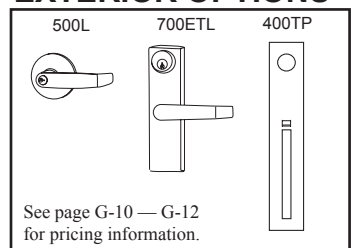

DELANEY

Copyright © DELANEY HARDWARE. All rights reserved.