



EA SERIES - BA STYLE GRADE 2 CYLINDRICAL KNOB



DIMENSIONS

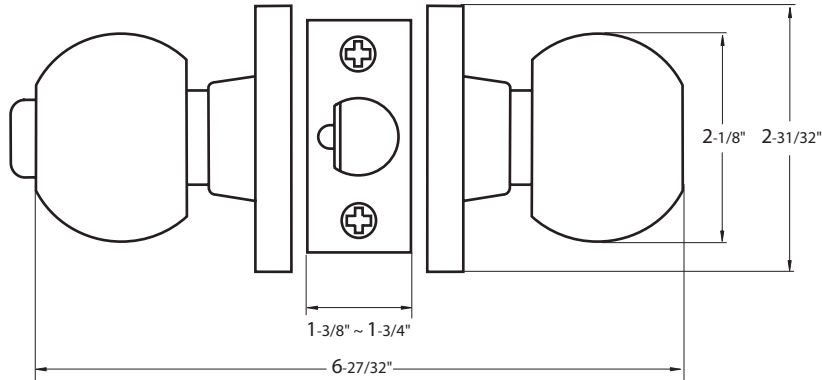

STANDARD SPECIFICATIONS

| | | | |
|-------------------------------------|---|-----------------------------|---|
| Door Prep | Cross bore: 2-1/8" Edge bore: 1" Latch face: 2-3/4": 1-1/8" x 2-1/4" 2-3/8": 1" x 2-1/4" | Latches | Entrance: 2-3/4" (E9070T) standard. 2-3/8" (E9060T) optional Pass/Priv: 2-3/4" (E9073T) standard. 2-3/8" (E9063T) optional Faceplate: 2-3/4": 1-1/8" x 2-1/4". 2-3/8": 1" x 2-1/4" Sq. Corner Bolt: 1/2" Stainless Steel throw. Meets 3-Hr. Fire Rating |
| Backset | 2-3/4" UL Latch standard, 2-3/8" optional | Strikes | 1-1/8 x 2-3/4" T-strike (9106) |
| Door Thickness | 1-3/8" ~ 2". Adjustable mounting plate | Door Handing | Not Required |
| Cylinder | SC4 6-pin standard, KW1 5-pin optional Entries packed KA2 | Interchangeable Core | Optional small-format 6-pin or 7-pin available |
| ANSI & Federal Standards | <ul style="list-style-type: none"> Meets & exceeds requirements of BHMA/ANSI A156.2 Series 4000, GR2, 400,000 Cycles. Meets FF-H-106C Federal Standard. | Product Features | <ul style="list-style-type: none"> Concealed Mounting Screws Panic Proof - Push/Turn |

ITEM DETAILS

| Model | Function | WT/LB | CTN QTY | | US32D Stainless Steel | US3 Polished Brass | US10B Oil Rubbed Bronze | US32D EI-IC Core (Core not included) Stainless Steel |
|--------|-----------|--------|---------|----------|--------------------------|-----------------------|-------------------------------|---|
| 100-EA | Entrance | 34 Lbs | 20 Pcs | Item No. | 333002 | 333003 | 333000 | 300500 |
| 104-EA | Storeroom | 34 Lbs | 20 Pcs | Item No. | 333622 | — | — | — |
| 101-EA | Passage | 28 Lbs | 20 Pcs | Item No. | 333822 | — | — | — |
| 102-EA | Privacy | 30 Lbs | 20 Pcs | Item No. | 333312 | — | — | — |
| 115-EA | Dummy | 13 Lbs | 20 Pcs | Item No. | 330752 | — | — | — |

Core not Included.



DELANEY

Copyright © DELANEY HARDWARE. All rights reserved.